

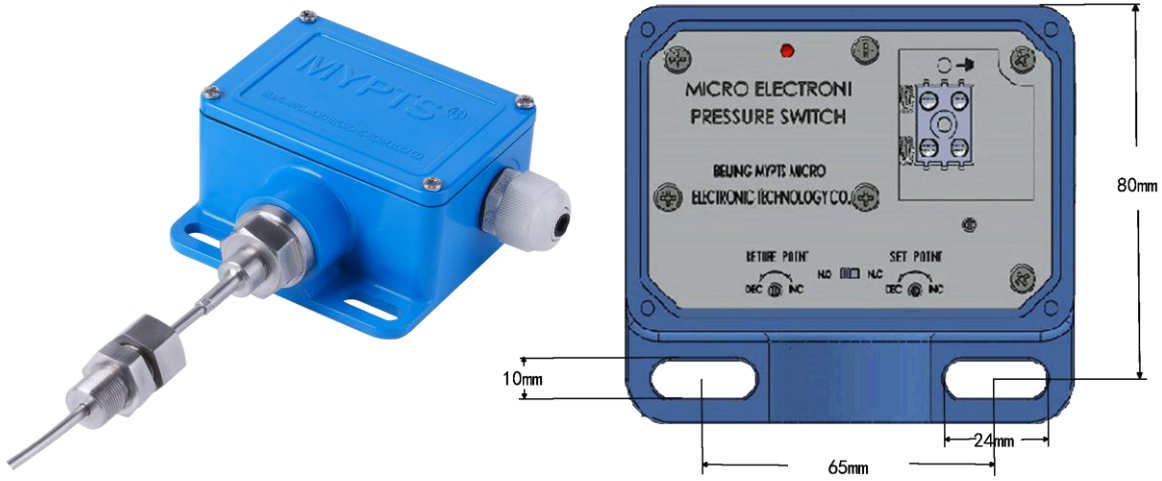



General microelectronic temperature switch

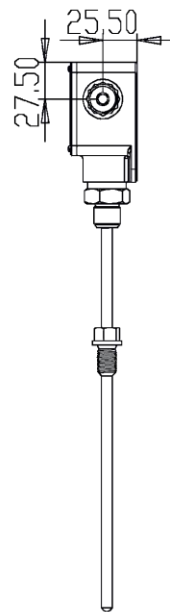

Product

Control Panel

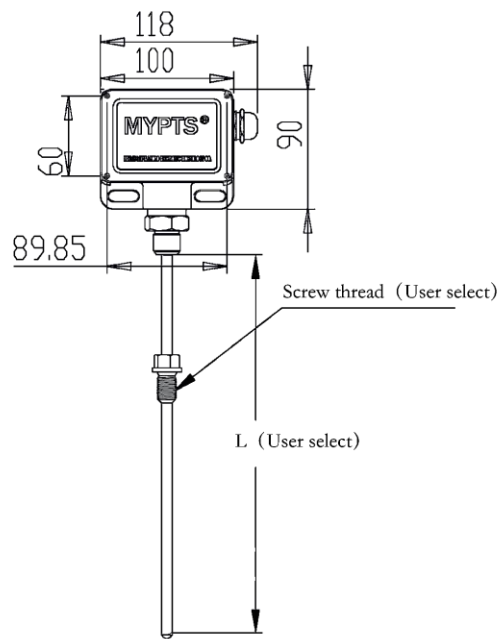

Size

Specifications and models

METS-	General electronic temperature switch			
	Code	Setting range		
	A	-50~150°C		
	B	-100~400°C		
	C	0~1200°C		
	O	Special setting range		
	Code	Accuracy grade		
	N	0.5 level (0.2FS)		
	X	0.2 level (0.1FS)		
		Code	Shell material	
		N	Aluminum	
		Code	Element standard & size	
		N	Φ4mm, length 100~1000mm, Pt00Ω Platinum	
		X	Customer request	
		Code	Electrical connection	
		N	Terminal, M20x1.5 standard waterproof cable	
		X	Customer request	
		Code	Safe location	
		N	Intrinsically safe	
		EP	Explosion Proof	

Note:

- ** Beyond the standard setting range, select the "O" code to specify the special range.
- ** Thermometric element size: the thread size of joint between thermometric element and protect suites must be provided before ordering the switch. If Code X is chosen, a different diameter and length can be specified for the standard Pt100Ω platinum thermal resistance.
- ** When Code X is opted for Electrical Connection, there is no requirement for the incoming cable joints, but the terminal wiring specifications cannot be altered.
- ** Suitable for the workplace have no corrosive to 316L stainless steel pipe materials and aluminum alloy shell.